

PULSAFEEDER®

The Five Function Valve is easily installed and allows simple, one-handed operation. The valve upgrades CHEM-TECH Series 100 and Series 200 metering pumps, plus all PULSAtron models up to 240 GPD. The Five Function Valve is packed with features that increase safety, enhance performance and generally improves the convenience of operation.

The functions are selected by setting two dual position selector knobs. The label on the back panel of the valve identifies each function with selector knob positions.

The Five Function Valve is compatible with most PULSAtron, and CHEM-TECH Series pumps. Connected to the existing discharge valve the Five Function Valve is capable of handling a large output flow as well as viscous liquids. A return port located on the side body provides flow of chemical back to the solution tank when in the air bleed or drain discharge mode.

Features

- Pressure Relief
- Back Pressure – Maintains output reproducibility and allows metering into atmospheric discharge.
- Anti-Siphon – Prevents siphoning through the pump when point of injection is lower than the pump or into the suction line of another pump. Rated at total vacuum.
- Air Bleed – Used during priming to manually remove air from the pump head.
- Discharge Drain – Depressurize pump discharge line without loosening tubing or fittings.

Operating Benefits

- Relieve excessive pressure in discharge line to protect connections and tubing.
- Maintain output reproducibility.
- Prevents siphoning.



Aftermarket

- Water Meters
- Gauges
- Dampeners
- Pressure Relief Valves
- KOPkits
- Tanks
- Pre-Engineered Systems



Five Function Valve

Five Function Valve

Specifications and Model Selection


| Five Function Valve Selection Guide | | L380 |
|-------------------------------------|---|------|
| Five Function Valve | L380 = Five Function Valve | |
| Max Pressure Rating | B = 50 PSI D = 100 PSI F = 150 PSI K = 250 PSI | |
| O-Ring Material | T = TFE | |
| Connection Size | 01 = 3/8" (0.95 cm) OD Tubing Connection 02 = 1/4" (0.635 cm) Male MNPT Connection 03 = 1/2" (1.27 cm) OD Tubing Connection 0P = 4 x 6 mm 0N = 4 x 10 mm 0S = 6 x 10 mm 0Y = 6 x 12 mm 0Q = 10 x 14 mm | |
| Body Materials | PVD = Polyvinylidene Fluoride (PVDF or Kynar) | |

Engineering Data

Materials of Construction:

| | |
|--|--|
| Valve Body: | GFPPPL |
| Diaphragm: | PVDF |
| O-Rings: | PTFE-faced CSPE |
| Hardware: | PTFE |
| Maximum Flow: | 188 SS |
| Maximum Viscosity: | 240 GPD (37.85 LPH) |
| Maximum Operating Pressure: | 1000 CPS |
| Pressure Relief Settings: (nominal cracking pressure) | 250 PSI (17 BAR) |
| Note: | 275 PSI (19 BAR) – red |
| | 175 PSI (12 BAR) – green |
| | 125 PSI (8.6 BAR) – blue |
| | Pressure relief will occur within 50% of maximum rating of pump. |

Important: Material Code - GFPPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

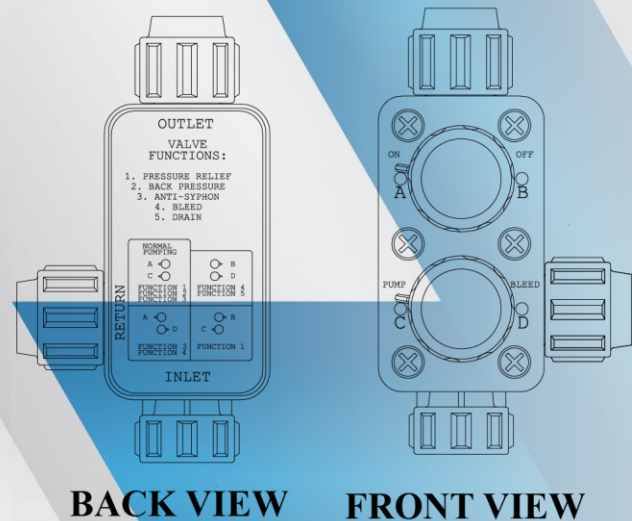

BACK VIEW FRONT VIEW



27101 Airport Road
 Punta Gorda, FL 33982
 Phone: ++1(941) 575-3800
 Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

FFV001 I14

