

## PULSAtron Series C Plus

The Pulsatron Series C Plus offers manual function control over stroke length and stroke rate as standard with the option to select external pace for automatic control. The primary difference between the Series A Plus and Series C Plus is the pressure rating.

Four distinct models are available, having pressure capabilities of 80 PSIG (5.6 BAR), and flow capacities up to 30 GPD (4.7 lph), with a turndown ratio of 100:1. Metering performance is reproducible to within  $\pm 3\%$  of maximum capacity.

### FEATURES

- Manual Control by on-line adjustable stroke rate and stroke length.
- Highly Reliable timing circuit.
- Circuit Protection against voltage and current upsets.
- Solenoid Protection by thermal overload with auto-reset.
- Water Resistant, for outdoor and indoor applications.
- Internally Dampened To Reduce Noise.
- Guided Ball Check Valve Systems, to reduce back flow and enhance outstanding priming characteristics.
- Few Moving Parts and Wall Mountable.
- Safe & Easy Priming with durable leak-free bleed valve assembly (standard).
- Optional Control: External pace with auto.manual selection.



### BENEFITS

- Reliable metering performance.
- Rated "hot" for continuous duty.
- High viscosity capability.
- Leak-free, sealless, liquid end.



### CONTROLS

#### Manual Stroke Rate

- Turn-Down Ratio 10:1

#### Manual Stroke Length

- Turn-Down Ratio 10:1

#### External Pacing Option

- Auto/Manual Selection



Tested and Certified by WQA  
against NSF/ANSI/CAN 61 & 372.



PVDF & PVC Degass Head Pumps.  
See [www.wqa.org](http://www.wqa.org) for  
certification parameters.



## SPECIFICATIONS

MODEL		LD02	LD03	LD04	LD54
Capacity nominal (max)	GPH	0.25	0.50	1.00	1.25
	GPD	6	12	24	30
	LPH	0.9	1.9	3.8	4.7
Pressure (max)	PSIG	80	80	80	80
	BAR	5.6	5.6	5.6	5.6
Connections:	Tubing	1/4" ID X 3/8" OD			
	Piping	3/8" ID X 1/2" OD 1/4" FNPT			

## ENGINEERING DATA

Pump Head Materials Available	GFPPPL, PVC, PVDF, 316 SS
Diaphragm	PTFE-faced CSPE-backed
<b>Check Valves Materials Available</b>	
Seats/O-Rings	PTFE, CSPE, Viton
Balls	Ceramic, PTFE, 316 SS, Alloy C
Fittings Materials Available	GFPPPL, PVC, PVDF
Bleed Valve	Same as fitting and check valve selected, except 316SS
Injection Valve & Foot Valve Assy	Same as fitting and check valve selected
Tubing	Clear PVC, White PE


Important: Material Code - GFPPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

Reproducibility	±3% at maximum capacity
Viscosity Max CPS	1000 CPS
For viscosity up to 3000 CPS, select connection size 3, 4, B or C with 316SS ball material. Flow rate will determine connection/ball size. Greater than 3000 CPS require spring loaded ball checks. See Selection Guide for proper connection.	
Stroke Frequency Max SPM	125
Stroke Frequency Turn-Down Ratio	10:1
Stroke Length Turn-Down Ratio	10:1
Power Input	115 VAC / 50-60 HZ / 1 ph 230 VAC / 50-60 HZ / 1 ph
<b>Average Current Draw</b>	
@ 115 VAC: Amps	0.6 Amps
@230 VAC: Amps	0.3 Amps
Peak Input Power	130 Watts
Average Input Power @ Max SPM	50 Watts
Approvals	Conforms to ANSI/NSF STD. 50

## DIMENSIONS

Series C Dimensions (inches)						
Model No.	A	B	C	D	E	Shipping Weight
LD02	5.0	9.6	9.5	6.5	8.2	10
LD03	5.0	9.9	9.5	6.5	8.5	10
LD04	5.0	9.9	9.5	6.5	8.5	10
LD54	5.0	9.9	9.5	6.5	8.5	10

NOTE: Inches X 2.54 = cm

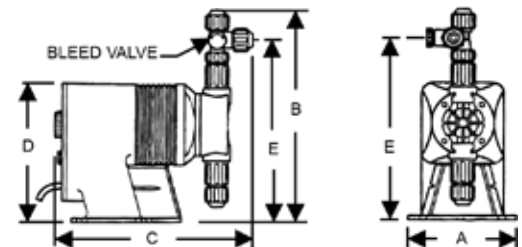

27101 Airport Road  
Punta Gorda, FL 33982  
Tel: (941) 575-3800  
Fax: (941) 575-4085  
[www.pulsatron.com](http://www.pulsatron.com)



An ISO Certified Company

**IBEX**  
EMP026 F21